

**VPG** Foil Resistors

VFR • ALPHA ELEC. • POWERTRON • APR

**Consistent Precision  
& Reliability**



**High-Precision  
Current Sense Resistors**

# Measuring current flow is essential for managing system performance

Circuit designers and system operators need to know the magnitude of current flowing through a circuit – whether to maximize operating performance, to prevent component and system damage, or to allow proper control and feedback of the numerous sensors and actuators in modern applications.

Current sense resistors offer a cost-effective, yet highly precise solution to measure current flow, allowing improved system efficiency of power supply or battery management applications, while avoiding current conditions potentially causing component damage.

According to Ohm's law,  $V = I \cdot R$ , the voltage drop measured across a resistor is proportional to the current flowing through the resistor. With the known value of resistance (R), the voltage drop sensed across the resistor directly indicates the intensity of the current flowing through it.

By mastering the simple principle of a current sensing resistor, circuit designers are offered the most precise current measurement method available

With many decades of resistor manufacturing experience, VPG Foil Resistors offers multiple current sense material technologies: Precision Foil, Bulk Metal Foil®, Thin Film, and Metal Strip, all with the purpose of providing -

**Consistent Precision & Reliability.**

## Sensing the Future of Electronics

Current sense resistors are an integral part of any new technological innovation and trending markets, including equipment for



### Telecommunications

5G, data centers and fiber optics, IoT, IIoT



### Automotive

Hybrid and Electric Vehicles battery management (charging, surge protection), drive-by-wire, autonomous driving, automotive test equipment



### Energy

Smart grid and renewable energy meters, current converters, energy storage



### Industrial

Semiconductor testing, motor drives control, Electronic beam applications, automatic test equipment, precision instrumentation



### Medical

Precision measurement and dosing, defibrillator, implants, MRT, UPS, monitoring devices



### AMS

Gyro navigation controls, sonar, high-power pulse radio transmitter

## Available features

- Four terminal 'Kelvin' configuration as standard, 2-terminal configuration where beneficial
- Networks
- SMD, Power Shunt, Lead Wire constructions
- Hermetically sealed
- RoHS compliant and tin/lead components available
- AEC-Q200 compliant components available
- Sulfur resistant
- Suitable for most types of soldering processes
- Electron beam welded shunts

## Customization options

- Size and type of package, heatsink, mounting method
- Performance specifications

## How to select the best product for your needs

Our Application Engineers are happy to support you with the selection of the best matching product. To facilitate, please provide the following information to [foil@vpgsensors.com](mailto:foil@vpgsensors.com)


- Resistance value
- Tolerance
- Maximum Power/Current/Voltage
- Temperature range
- End Application
- Demand for increased stability using Post Manufacturing Operations (PMO)

- Matched sets
- In-Process and Post Manufacturing Operations (PMO) tests

## True 4-Terminal Kelvin Configuration

Four-terminal resistors enable current to be applied through two opposite leads and a sensing voltage to be measured across the other two leads. Such a “Kelvin” configuration\* effectively eliminates the resistance and temperature coefficient of the leads hence no influence from the outside to the TCR of the resistor itself. The separation of current and voltage electrodes

also eliminates the impedance contribution of the wiring and contact resistances. VPG Foil Resistors current sense resistors typically come with a true, physical 4-terminal Kelvin configuration as a standard, with very few exceptions due to very particular use scenarios of the individual component.

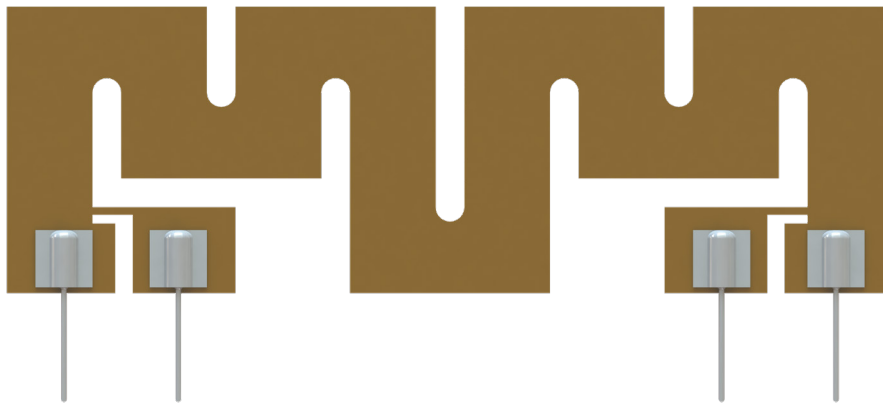

### 4-Pin Kelvin Resistor

- $R(I1-I2) > R_{nominal}$
- $R(S1-S2) > R_{nominal}$
- $R(I1-S1) \neq 0 \text{ Ohm}$
- $R(I2-S2) \neq 0 \text{ Ohm}$


\* after William Thomson, Lord Kelvin who invented the Kelvin bridge in 1861

## Non Hot-Spot Design

We are using chemical or mechanical trimming methods for our resistors, dependent on the best treatment of the production material. Unlike other manufacturers, VPG Foil Resistors applies the trimming always on the complete active surface of our

components to avoid any cuts into the material. This assures a non hot-spot design, facilitating an even thermal dissipation all across the maximum available surface.

Trimming by standard laser cut (not used by VPG Foil Resistors)

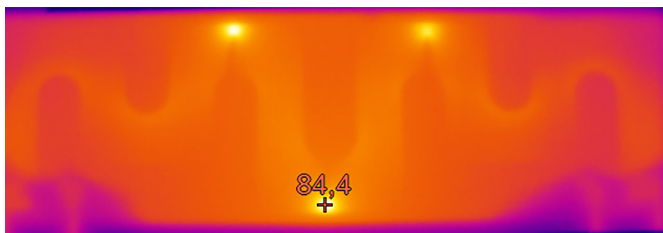










Max. temperature 84.4°C

Trimming with VPG Foil Resistors technology











Max. temperature 43.7°C

## SMD Current Sense Resistors

Product	Model	Description	Resistance Range	Best Tolerance	TCR (-55°C to +125°C, +25°C ref.) Typical	Rated Power at +70°C	Load Life Stability 2000 Hours, +70°C Under Power-Typical
	<b>CSM3637</b>	High-precision metal strip current sense resistors (4-terminal)	2 mΩ to 200 mΩ	±0.1%	±15 ppm/°C max	to 3 W	±0.2%
	<b>CSM2512</b>	High-precision metal strip current sense resistors (4-terminal)	5 mΩ to 200 mΩ	±0.1%	±15 ppm/°C	to 1 W	±0.2%
	<b>CSM2512F</b>	High-precision Foil current sense resistor (4-terminal)	50 mΩ to 1 Ω	±0.1%	±10 ppm/°C	to 1 W	±0.05%
	<b>FRCS2512</b>	High Precision Foil current sense resistor (4-terminal) Wraparound	100 mΩ to 1 Ω	±0.1%	±5 ppm/°C	to 1 W	±0.01%
	<b>CSM3637F</b>	High-precision Foil current sense resistor (4-terminal)	20 mΩ to 400 mΩ	±0.1%	±10 ppm/°C	to 3 W	±0.05%
	<b>FRCS3637</b>	High Precision Foil current sense resistor (4-terminal) Wraparound	40 mΩ to 500 mΩ	±0.1%	±10 ppm/°C	to 4 W	±0.02%
	<b>CSM3637PY</b>	High-precision, current sensing, power surface-mount, low profile, metal strip resistor (4-terminal)	2 mΩ to 100 mΩ	±0.1%	±15 ppm/°C	to 5 W	±0.6%
	<b>CSM2512RS</b>	Metal Strip current sense SMD resistor	10 mΩ to 100 mΩ	±0.5%	to ±25 ppm/°C	to 1 W	±0.2%
	<b>CSM2817</b>	Metal Strip current sense SMD resistor	1 mΩ to 100 mΩ	±0.1%	to ±15 ppm/°C	5 W	±0.5%

## SMD Current Sense Resistors

Product	Model	Description	Resistance Range	Best Tolerance	TCR (-55°C to +125°C, +25°C ref.) Typical	Rated Power at +70°C	Load Life Stability 2000 Hours, +70°C Under Power-Typical
	<b>CSM2512A</b>	Metal Strip current sense SMD resistor	0.2 mΩ to 5 mΩ	±1%	to ±25 ppm/°C	to 5 W	±0.5%
	<b>CSM2726P</b>	Metal Strip current sense SMD resistor	0.2 mΩ to 5 mΩ	±0.5%	to ±20 ppm/°C	to 12 W	±0.5%
	<b>CSM3920A</b>	Metal Strip current sense SMD resistor	0.2 mΩ - 5 mΩ	±1%	to ±25 ppm/°C	to 8 W	±0.5%
	<b>CSM4026P</b>	Metal Strip current sense SMD resistor	0.2 mΩ - 5 mΩ	±0.5%	to ±20 ppm/°C	to 12 W	±0.5%
	<b>CSM5930A</b>	Metal Strip current sense SMD resistor	0.2 mΩ - 3 mΩ	±1%	to ±25 ppm/°C	to 9 W	±0.5%
	<b>CSM8536</b>	Power shunt resistor, 2 & 4 terminals	25 μΩ - 50 μΩ	±0.5%	to ±50 ppm/°C (+20°C to 175 °C)	50 W	±1% (1000 Hours)
	<b>CSM8518</b>	Power shunt resistor, 2 & 4 terminals	50 μΩ - 100 μΩ	±0.5%	to ±50 ppm/°C (+20°C to 175 °C)	36 W	±1% (1000 Hours)
	<b>CSM6918</b>	Power shunt resistor, 2 & 4 terminals	50 μΩ - 100 μΩ	±0.5%	to ±50 ppm/°C (+20°C to 175 °C)	25 W	±1% (1000 Hours)

## SMD Current Sense Resistors











Product	Model	Description	Resistance Range	Best Tolerance	TCR (-55°C to +125°C, +25°C ref.) Typical	Rated Power at +70°C	Load Life Stability 2000 Hours, +70°C Under Power-Typical
	<b>VCS1610</b>	High-precision, current sensing foil chip resistor (4-terminal)	0.1 Ω to 10 Ω	±0.5%	±10 ppm/°C	0.25 W	±0.02%
	<b>VCS1610Z</b>	High-precision, current sensing Z-foil chip resistor (4-terminal)	0.3 Ω to 10 Ω	±0.5%	±5 ppm/°C	0.25 W	±0.015%
	<b>VCS1625</b>	High-precision, current sensing foil resistor (4-terminal)	0.01 Ω to 10 Ω	±0.1%	±2 ppm/°C	0.5 W	±0.02%
	<b>VCS1625P</b> <b>VCS1625ZP</b>	High-precision, Foil surface mount current sensing foil resistor (4-terminal) for high power	0.01 Ω to 10 Ω	±0.2%	±0.2 ppm/°C	1 W	±0.015%
	<b>VCS1625Z (Z-Foil)</b> <b>FRCS1625</b>	High-precision, current sensing Z foil resistor (4-terminal)	3 mΩ to 10 Ω	±0.1%	±0.2 ppm/°C	1.5 W	±0.015%
	<b>VPR221S</b> <b>VPR221SZ (Z Foil)</b>	High-precision, high power, current sensing Z foil surface mount resistor in TO-220 package	0.5 Ω to 500 Ω	±0.01%	±0.2 ppm/°C	8 W, on heat sink 1.5 W in free air	±0.005%
	<b>FPS 2-T220</b>	Precision Power Shunt resistor 2 - terminals	0.002 Ω to 10 Ω	±0.5%	±50 ppm/°C	15 W, on heat sink 1.5 W in free air	±0.1% 1000hrs
	<b>FPS 4-T220</b>	Precision Power Shunt resistor 4 - terminals	0.002 Ω to 10 Ω	±0.1%	±30 ppm/°C	15 W, on heat sink 1.5 W in free air	±0.1% 1000hrs
	<b>SPS 4-T220</b>	Precision Power Shunt resistor 4 - terminals	0.005 Ω to 10 Ω	±0.1%	±5 ppm/°C	15 W, on heat sink 1.5 W in free air	±0.1% 1000hrs
	<b>USS 4-T220</b>	High precision power current sense resistor 4-terminals	0.2 Ω to 80 Ω	±0.01%	±3 ppm/°C	10 W, on heat sink 1.5 W in free air	±0.01% 1000hrs

## SMD Current Sense Resistors













Product	Model	Description	Resistance Range	Best Tolerance	TCR (-55°C to +125°C, +25°C ref.) Typical	Rated Power at +70°C	Load Life Stability 2000 Hours, +70°C Under Power-Typical
	<b>RBF</b>	High-precision Foil current sense resistor (Flip Chip 2-terminal)	0.01 Ω to 1 Ω	±0.5%	±10 ppm/°C	1 W	±0.05%
	<b>RBD</b>	High-precision Foil current sense resistor (Flip Chip 2-terminal)	0.01 Ω to 1 Ω	±0.5%	±10 ppm/°C	0.5 W	±0.05%
	<b>FNP Series</b>	High Power Precision Shunt Resistor, Up to 500W	0.001 Ω to 10 Ω	±0.05%	±5 ppm/°C	500 W, on heat sink	±0.2%
	<b>PSB Series</b>	Ultra Precision Shunt Resistor, Up to 40W	0.001 Ω to 10 Ω	±0.1%	±5 ppm/°C	40 W, on heat sink 12 W in free air, at +25°C	±0.05%
	<b>SNR 4-T227</b>	Precision power shunt resistor 4-terminals	0.002 Ω to 50 Ω	±0.1%	±2 ppm/°C (20°C to +60°C)	80 W	±0.1% 1000hrs
	<b>FHS 4-4618</b>	Precision power shunt resistor 4-terminals	0.001 Ω to 100 Ω	±0.1%	±25 ppm/°C (20°C to +60°C)	50 W, on heat sink 3 W in free air	±0.1% 1000hrs
	<b>FNR 2-T227</b>	Precision power shunt resistor 2-terminals	0.001 Ω to 100 Ω	±0.1%	±50 ppm/°C (20°C to +60°C)	80 W	±0.1% 1000hrs
	<b>FNR 4-T227</b>	Precision power shunt resistor 4-terminals	0.001 Ω to 50 Ω	±0.1%	±25 ppm/°C (20°C to +60°C)	80 W	±0.1% 1000hrs
	<b>FPR 2-T227</b>	Precision power shunt resistor 2-terminals	0.001 Ω to 100 Ω	±0.1%	±50 ppm/°C (20°C to +60°C)	60 W	±0.1% 1000hrs
	<b>FPR 4-T227</b>	Precision power shunt resistor 4-terminals	0.001 Ω to 50 Ω	±0.1%	±25 ppm/°C (20°C to +60°C)	60 W	±0.1% 1000hrs
	<b>KHN 2-T227</b>	Power shunt resistor 2-terminals	0.05 Ω to 5 MΩ	±1%	±100 ppm/°C (20°C to +60°C)	350 W	±1% 1000hrs
	<b>KHR 4-T227</b>	Power shunt resistor 4-terminals	0.05 Ω to 5 MΩ	±1%	±100 ppm/°C (20°C to +60°C)	200 W	±1% 1000hrs















## Leaded Current Sense Resistors

Product	Model	Description	Resistance Range	Best Tolerance	TCR (-55° to +125°C, 25°C ref.) Typical	Rated Power at +25°C	Load Life Stability 2000 Hours, +25°C at rated power - Typical
	<b>VCS232</b>	High-precision power current sense resistor, conformally coated (4-terminal)	0.2 Ω to 500 Ω	±0.02%	±2 ppm/°C	2 W, free air	±0.01%
	<b>VCS232Z</b>	High-precision power current sense Z Foil resistor (4-terminal)	0.25 Ω to 500 Ω	±0.02%	±0.2 ppm/°C	2 W, free air	±0.005%
	<b>PCS301 PCS302</b>	High-precision, high power, current sensing resistors (4-terminal)	5 mΩ to 250 mΩ	±0.5%	±3 ppm/°C	10 W, on heat sink 3 W in free air	±0.02%
	<b>VCS331 VCS332</b>	High-precision, high power, current sensing foil resistors (4-terminal)	0.25 Ω to 500 Ω	±0.1%	±1 ppm/°C (0°C to +60°C)	10 W, on heat sink 3 W in free air	±0.01%
	<b>VCS331Z VCS332Z</b>	High-precision, high power, current sensing Z foil resistors (4-terminal)	0.25 Ω to 500 Ω	±0.01%	±0.2 ppm/°C	10 W, on heat sink 3 W in free air	±0.005% on heat sink
	<b>CSNG</b>	Ultra High-precision, high power, Z Foil customized current sense resistors	>6 mΩ to 500 Ω	±0.01%	±0.2 ppm/°C (0°C to +60°C)	20 W, free air	±0.005%
	<b>VPR247</b>	Hermetically-sealed and molded power high-precision current sensing foil resistors (4-terminal)	0.05 Ω to 500 Ω	±0.01%	±2 ppm/°C	10 W, on heat sink 3 W in free air	±0.01%
	<b>VPR247Z</b>	Hermetically-sealed and molded power high-precision current sensing Z foil resistors (4-terminal)	0.25 Ω to 500 Ω	±0.01%	±0.2 ppm/°C	3 W, free air 10 W, heat sink"	±0.005% on heat sink
	<b>VPR221</b>	High-precision, high power, current sensing foil resistor in TO-220 package (4-terminal)	0.5 Ω to 500 Ω	±0.01%	±2 ppm/°C	8 W, on heat sink 1.5 W in free air	±0.05%
	<b>VPR221Z (Z Foil)</b>	High-precision, high power, current sensing Z foil resistor in TO-220 package (4-terminal)	0.5 Ω to 500 Ω	±0.01%	±0.2 ppm/°C	8 W, on heat sink 1.5 W in free air	±0.005%

## Leaded Current Sense Resistors

Product	Model	Description	Resistance Range	Best Tolerance	TCR (-55° to +125°C, 25°C ref.) Typical	Rated Power at +25°C	Load Life Stability 2000 Hours, +25°C at rated power - Typical
	<b>UNR 4-3425</b>	High precision power current sense resistor 4-terminals	0.05 Ω to 650 Ω	±0.01%	±3 ppm/°C	50 W	±0.01% 1000hrs
	<b>UNR 4-4020</b>	High precision power current sense resistor 4-terminals	0.05 Ω to 100 Ω	±0.01%	±3 ppm/°C	50 W, on heat sink 2.5 W in free air	±0.01% 1000hrs
	<b>USR 4-3425</b>	High precision power current sense resistor 4-terminals	0.05 Ω to 650 Ω	±0.01%	±3 ppm/°C	30 W	±0.01% 1000hrs
	<b>USR 4-4020</b>	High precision power current sense resistor 4-terminals	0.05 Ω to 100 Ω	±0.01%	±3 ppm/°C	30 W, on heat sink 2.5 W in free air	±0.01% 1000hrs
	<b>FHR 4-2321</b>	Precision power shunt resistor 4-terminals	0.001 Ω to 50 Ω	±0.1%	±15 ppm/°C (20°C to +60°C)	40 W, on heat sink 3 W in free air	±0.1% 1000hrs
	<b>FPR 2-T218</b>	Precision power shunt resistor 2-terminals	0.002 Ω to 50 Ω	±0.25%	±50 ppm/°C (20°C to +60°C)	30 W, on heat sink 3 W in free air	±0.1% 1000hrs
	<b>SHR 4-2321</b>	Precision power shunt resistor 4-terminals	0.001 Ω to 0.005 Ω	±0.1%	±2 ppm/°C (20°C to +60°C)	40 W, on heat sink 3 W in free air	±0.1% 1000hrs
	<b>UNR/USR 4-1410</b>	High precision power current sense resistor 4-terminals	0.1 Ω to 100 Ω	±0.01%	±3 ppm/°C	0.8 W	±0.01% 1000hrs
	<b>FPR 2-T220/T221</b>	Precision power shunt resistor 2-terminals	0.002 Ω to 10 Ω	±0.5%	±50 ppm/°C (20°C to +60°C)	15 W, on heat sink 1.5 W in free air	±0.1% 1000hrs
	<b>FPR 4-T220/T221</b>	Precision power shunt resistor 4-terminals	0.002 Ω to 10 Ω	±0.1%	±25 ppm/°C (20°C to +60°C)	15 W, on heat sink 1.5 W in free air	±0.1% 1000hrs
	<b>SPR 4-T220</b>	Precision power shunt resistor 4-terminals	0.005 Ω to 10 Ω	±0.1%	±2 ppm/°C (20°C to +60°C)	15 W, on heat sink 1.5 W in free air	±0.1% 1000hrs
	<b>UNR 4-T220B</b>	High precision power current sense resistor 4-terminals	0.2 Ω to 80 Ω	±0.01%	±3 ppm/°C	15 W, on heat sink 1.5 W in free air	±0.01% 1000hrs

## Leaded Current Sense Resistors

Product	Model	Description	Resistance Range	Best Tolerance	TCR (-55° to +125°C, 25°C ref.) Typical	Rated Power at +25°C	Load Life Stability 2000 Hours, +25°C at rated power - Typical
	<b>USR 4-T220B</b>	High precision power current sense resistor 4-terminals	0.2 Ω to 80 Ω	±0.01%	±3 ppm/°C	10 W, on heat sink 1.5 W in free air	±0.01% 1000hrs
	<b>FHR 4-3825/4618</b>	Precision power shunt resistor 4-terminals	0.001 Ω to 100 Ω	±0.1%	±10 ppm/°C (20°C to +60°C)	50 W, on heat sink 3 W in free air	±0.1% 1000hrs
	<b>FPN Network</b>	Precision shunt network resistors	0.001 Ω to 90 Ω	±0.1%	±25 ppm/°C (20°C to +60°C)	2 W	±0.1% 1000hrs
	<b>FPR 2-2614</b>	Precision shunt resistor 2-terminals	0.01 Ω to 100 Ω	±0.1%	±50 ppm/°C (20°C to +60°C)	2 W	±0.1% 1000hrs
	<b>FPR 4-3316</b>	Precision shunt resistor 4-terminals	0.001 Ω to 50 Ω	±0.1%	±25 ppm/°C (20°C to +60°C)	2 W	±0.1% 1000hrs
	<b>PCS 302</b>	Precision power current sense resistor 4-terminals	0.001 Ω to 10 Ω	±0.1%	±3 ppm/°C (0°C to +60°C)	30 W, on heat sink 3 W in free air	±0.1% 1000hrs
	<b>SHN Networks</b>	Precision shunt network resistors	0.001 Ω to 90 Ω	±0.1%	±2 ppm/°C (20°C to +60°C)	20 W, on heat sink 2 W in free air	±0.1% 1000hrs
	<b>SHR 4-3825/4618</b>	Precision power shunt resistor 4-terminals	0.005 Ω to 50 Ω	±0.1%	±2 ppm/°C (20°C to +60°C)	50 W, on heat sink 3 W in free air	±0.1% 1000hrs
	<b>SPN Networks</b>	Precision shunt network resistors	0.001 Ω to 90 Ω	±0.1%	±2 ppm/°C (20°C to +60°C)	2 W	±0.1% 1000hrs
	<b>SPR 4-3316</b>	Precision shunt resistor 4-terminals	0.005 Ω to 50 Ω	±0.1%	±2 ppm/°C (20°C to +60°C)	2 W	±0.1% 1000hrs
	<b>USR 4-1414</b>	High precision power current sense resistor 4-terminals	0.5 Ω to 100 Ω	±0.01%	±3 ppm/°C	25 W, on heat sink 0.8 W in free air	±0.01% 1000hrs
	<b>MSR Series</b>	Bare Metal Element Current Sense through-hole Resistors	0.005 Ω to 0.1 Ω	±1%	±20 ppm/C	to 5 W	-



Scan me for more  
product details

Contact us at [foil@vpgsensors.com](mailto:foil@vpgsensors.com) | [vpgfoilresistors.com](http://vpgfoilresistors.com)

The document and the products described herein are subject to change without notice and subject to specific disclaimers.  
Please visit <https://vpgsensors.com/disclaimer> for more information.